



TNCC IP67

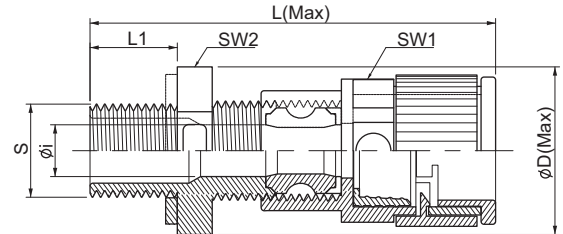

● G(PF) ● M ● Pg

- Material : High Quality Polyamide 6
- Protective : IP 67 (EN 60529)
- Temperature Range : -40°C to +105°C
- Short Term : up to +150° C
- Self-Extinguishing : UL94-HB / Free of Halogen Phosphorous and cadmium
- Color : Black & Gray
- Application : Machine tool, Shipbuilding, Tramway, Industrial / Automatic Machinery, Printing Machine etc. Joint box with connector, Connector to avoid the cutoff of the cable in the machine.


PRODUCT SIZE



PF Thread (JIS B0202)

(Dimensions in mm)

Black	Gray	Thread	Tube Size	Øi(Min)	Øi(Max)	S	L1	L	ØD	SW1	SW2
TNCC-G10B	TNCC-G10G	G1/2"	10	3.5	6.5	20.9	15	69.5	23	22.6	20.3
TNCC-G12B	TNCC-G12G	G1/2"	12	4.0	8.0	20.9	15	70.0	25	25.5	22.7
TNCC-G16B	TNCC-G16G	G1/2"	16	7.0	12.3	20.9	15	74.0	30	25.4	27.7
TNCC-G1622B	TNCC-G1622G	G1/2"	22	12.0	15.2	20.9	15	85.0	41	34	36.9
TNCC-G22B	TNCC-G22G	G3/4"	22	12.0	18.0	26.4	15	85.0	41	34	36.9
TNCC-G228B	TNCC-G228G	G3/4"	28	18.0	20.3	26.4	15	89.0	47	43.4	43.0
TNCC-G28B	TNCC-G28G	G1"	28	18.0	26.0	33.2	15	89.0	47	43.4	43.0
TNCC-G36B	TNCC-G36G	G1 1/4"	36	22.0	33.0	41.9	19	112.0	56	53.0	52.2
TNCC-G48B	TNCC-G48G	G2"	48	30.0	38.0	59.6	19	120.0	68	66.5	64.1



Metric Thread (EN 60423)

(Dimensions in mm)

Black	Gray	Thread	Tube Size	Ø _i (Min)	Ø _i (Max)	S	L ₁	L	Ø _d	SW1	SW2
TNCC-M10B	TNCC-M10G	M12 X 1.5	10	3.5	6.5	12	15	69.5	23	22.6	20.3
TNCC-M120B	TNCC-M120G	M16 X 1.5	10	3.5	6.5	16	15	69.5	23	22.6	20.3
TNCC-M102B	TNCC-M102G	M12 X 1.5	12	4.0	7.1	12	15	70.0	25	25.5	22.7
TNCC-M12B	TNCC-M12G	M16 X 1.5	12	4.0	8.0	16	15	70.0	25	25.5	22.7
TNCC-M162B	TNCC-M162G	M20 X 1.5	12	4.0	8.0	20	15	70.0	25	25.5	22.7
TNCC-M126B	TNCC-M126G	M16 X 1.5	16	7.0	10.9	16	15	74.0	30	25.4	27.7
TNCC-M16B	TNCC-M16G	M20 X 1.5	16	7.0	12.3	20	15	74.0	30	25.4	27.7
TNCC-M1622B	TNCC-M1622G	M20 X 1.5	22	12.0	14.5	20	15	85.0	41	34.0	36.9
TNCC-M22B	TNCC-M22G	M25 X 1.5	22	12.0	18.0	25	15	85.0	41	34.0	36.9
TNCC-M228B	TNCC-M228G	M25 X 1.5	28	18.0	19.5	25	15	89.0	47	43.4	43.0
TNCC-M28B	TNCC-M28G	M32 X 1.5	28	18.0	26.0	32	15	89.0	47	43.4	43.0
TNCC-M36B	TNCC-M36G	M40 X 1.5	36	22.0	33.0	40	19	112.0	56	53.0	52.2
TNCC-M48B	TNCC-M48G	M50 X 1.5	48	30.0	38.0	50	19	120.0	68	66.5	64.1

Pg Thread (DIN 40430)

Black	Gray	Thread	Tube Size	Ø _i (Min)	Ø _i (Max)	S	L ₁	L	Ø _d	SW1	SW2
TNCC-P07B	TNCC-P07G	Pg07	10	3.5	6.5	12.5	15	69.5	23	22.6	20.3
TNCC-P09B	TNCC-P09G	Pg09	10	6.5	6.5	15.2	15	69.5	23	22.6	20.3
TNCC-P072B	TNCC-P072G	Pg07	12	4.0	8.0	12.5	15	70.0	25	25.5	22.7
TNCC-P092B	TNCC-P092G	Pg09	12	4.0	8.0	15.2	15	70.0	25	25.5	22.7
TNCC-P11B	TNCC-P11G	Pg11	12	4.0	8.0	18.6	15	70.0	25	25.5	22.7
TNCC-P132B	TNCC-P132G	Pg13.5	12	4.0	8.0	20.4	15	70.0	25	25.5	22.7
TNCC-P162B	TNCC-P162G	Pg16	12	4.0	8.0	22.5	15	70.0	25	25.5	22.7
TNCC-P096B	TNCC-P096G	Pg09	16	7.0	10.6	15.2	15	74.0	30	25.4	27.7
TNCC-P116B	TNCC-P116G	Pg11	16	7.0	12.3	18.6	15	74.0	30	25.4	27.7
TNCC-P13B	TNCC-P13G	Pg13.5	16	7.0	12.3	20.4	15	74.0	30	25.4	27.7
TNCC-P16B	TNCC-P16G	Pg16	16	7.0	12.3	22.5	15	74.0	30	25.4	27.7
TNCC-P122B	TNCC-P122G	Pg11	22	12.0	13.9	18.6	15	85.0	41	34.0	36.9
TNCC-P1322B	TNCC-P1322G	Pg13.5	22	12.0	14.8	20.4	15	85.0	41	34.0	36.9
TNCC-P1622B	TNCC-P1622G	Pg16	22	12.0	17.3	22.5	15	85.0	41	34.0	36.9
TNCC-P21B	TNCC-P21G	Pg21	22	12.0	18.0	28.3	15	85.0	41	34.0	36.9
TNCC-P218B	TNCC-P218G	Pg21	28	18.0	22.5	28.3	15	89.0	47	43.4	43.0
TNCC-P29B	TNCC-P29G	Pg29	28	18.0	26.0	37.0	15	89.0	47	43.4	43.0
TNCC-P36B	TNCC-P36G	Pg36	36	22.0	33.0	47.0	19	112.0	56	53.0	52.2
TNCC-P48B	TNCC-P48G	Pg48	48	30.0	38.0	59.3	19	120.0	68	66.5	64.1